

TORRENT CPM158

1200W AC/DC Hybrid Solar Surface Pump Kit

Reliable water, anywhere you need it.

The Torrent CPM158 is a high performance AC/DC surface solar water pump designed for transferring water from dams, tanks & creeks or light irrigation. Delivers up to 132 L/min with a maximum head of 37m.



HIGH PERFORMANCE
Up to 132 L/min
High Flow



WATER TRANSFER CAPABILITY
Up to 37 m head
Medium Head



AC/DC HYBRID
Solar or mains
backup



BUILT TO LAST
Cast Iron
construction




AUSTRALIAN SUPPORT
Local stock &
service



PERFORMANCE CURVE

Max Head: 37 m
Max Flow: 132 L/min

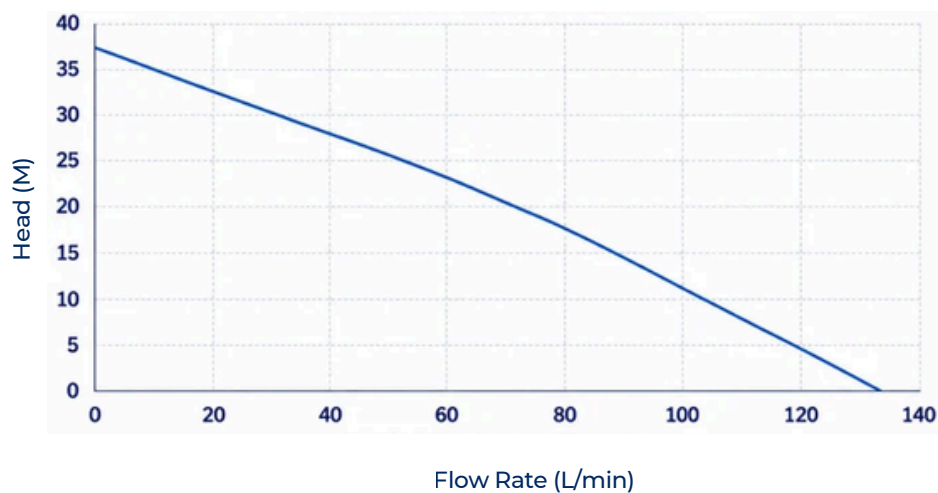

SPECIFICATIONS

Model	Torrent CPM158
SKU	OSP-TOR-X02
Pump Type	Surface Mounted
Power	1200 W
Max Flow	132 L/min
Max Head	37 m
Typical Flow @ 20 m	70 L/min
Voltage (DC)	80–150 V DC (Vmp)
Outlet Size	25mm (1") Female BSP
Recommended Panels	4 x 450 W (1,800 W Total)
Cable Length (Pump)	10 m Hardwired to Controller
Cable Length (Bore Probe)	30 m
Warranty	24 months

EXPECTED PERFORMANCE

Head (m)	Flow Rate (L/min)
0	132
5	118
10	100
15	85
20	70
25	50
30	30

RECOMMENDED APPLICATIONS



Livestock
watering



Light
Irrigation



Rural
properties



Remote
locations

Ideal for farms, rural properties and remote locations where a reliable and sustainable water supply is essential.



RELIABLE WATER



SUSTAINABLE POWER



AUSTRALIAN OWNED